


Val Wireless 50W RF LED driver 24 DCV (VaLO-Driver-24V-50W)



Important: Read All Instructions Prior to Installation

Function introduction

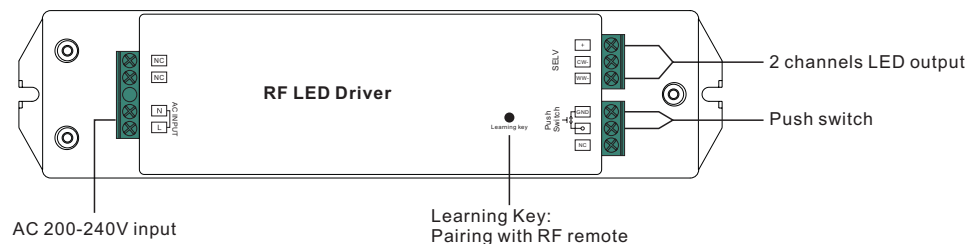

Product Data

Output	DC Voltage	24V DC
	Max. Current	2.08A/ch max., ch1+ch2=2.08A
	Rated Power	max. 50W
Input	Voltage Range	200-240V AC
	Frequency	50/60Hz
	Power Factor (Typ.)	> 0.9
	Efficiency (Typ.)	88% @ 230VAC
	Input Current (Typ.)	0.27A @ 230VAC
	Inrush Current (Typ.)	COLD START Max. 2A at 230VAC
Protection	Short Circuit	Yes, auto recovery after fault removed
	Over Current	Yes, auto recovery after fault removed
	Over Temperature	Yes, auto recovery after fault removed
Environment	Working Temp.	-20°C ~ +45°C
	Max. Case Temp.	85°C
	Working Humidity	10% ~ 95% RH non-condensing
	Storage Temp. & Humidity	-40°C ~ +80°C, 10% ~ 95% RH
Safety&EMC	Safety Standards	ENEC EN61347-1, EN61347-2-13 approved
	Withstand Voltage	I/P-O/P: 3.75KVAC

	EMC Emission	EN55015, EN61000-3-2, EN61000-3-3
	EMC Immunity	EN61547, EN61000-4-2,3,4,5,6,8,11, surge immunity Line-Line 1KV
Others	MTBF	193.6K hrs min. @ 230VAC at full load and 25°C ambient temperature
	Dimension	210*50*32mm (L*W*H)


- Dimmable LED driver with RF control
- Max. output power 50W
- 2 channels 12/24V DC constant voltage output
- Class II power supply, full isolated plastic case
- High power factor and efficiency
- To switch and dim dual color LED lighting

- Compatible with a variety of single color RF remotes
- IP20 rating
- Suitable for indoor LED lighting applications
- Radio Frequency : 868/869.5/916.5/434mhz
- 5 years warranty

Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

Wiring Diagram

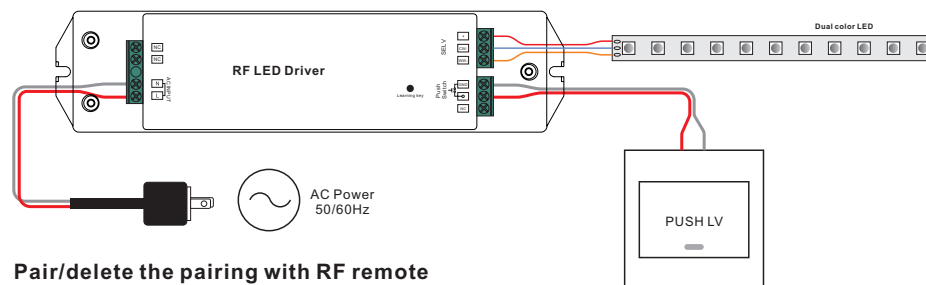


Pair/delete the pairing with RF remote

1. Do wiring according to connection diagram.
2. Pair RF Receiver with RF remote: please refer to the instruction of the remote that you would like to pair with.
3. Delete the pairing:
 - (1) Wire up the RF receiver correctly, power on.
 - (2) Press and hold down the “ **Learning Key** ” button on receiver for over 3 seconds until the connected light flashes, which means well deleted.

PUSH DIM:

While connected with PUSH LV, click the button to switch ON/OFF lights. Press and hold down the button to increase/decrease light intensity.

Product Dimension

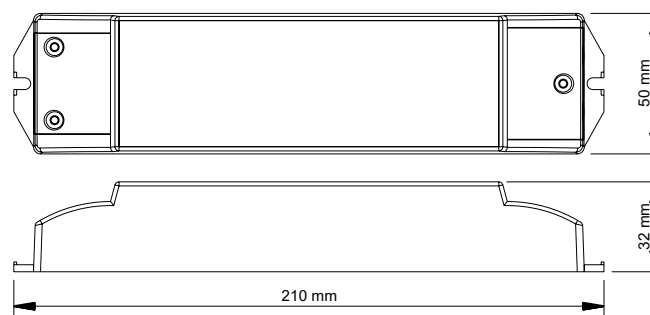

**LED
STORE**