

Product Mark

Model: paneeli120 4000k

Temperature: 20□

Tester: admin

Manufacture: LedStore.fi


Humidity: 65%

Test Date: 2018-01-02


Parameter

Name	Value	Name	Value	Name	Value
E(lx)	4232.94	Ra	93.2	Bink Freq(Hz)	-
CCT(K)	3929	S/P	1.8	Fluctuate Depth	-
Duv	0.0025	X	6202.1	Bink Percent	-
CIE(x,y)	0.3855, 0.3852	Y	6197.6	Bink Exponent	-
CIE(u,v)	0.2251, 0.3373	Z	3690.0	PAR(W/m2)	-
Dominant Wave(nm)	578.1	Rf	-	PPFD(umol/m2/s)	-
Purity	31.3%	Rg	-	YPFD(umol/m2/s)	-
Color Ratio(RGB)	19.9% 77.3% 2.8%	Ebh(mW/m2)	-	Ep(W/m2)	-
Peak Wave(nm)	454.6			Eb(W/m2)	-
Half Width(nm)	28.0			Ey(W/m2)	-
Candle E(fc)	393.40			Er(W/m2)	-
Ee(W/m2)	14.327			Erb Ratio	



Spectrogram

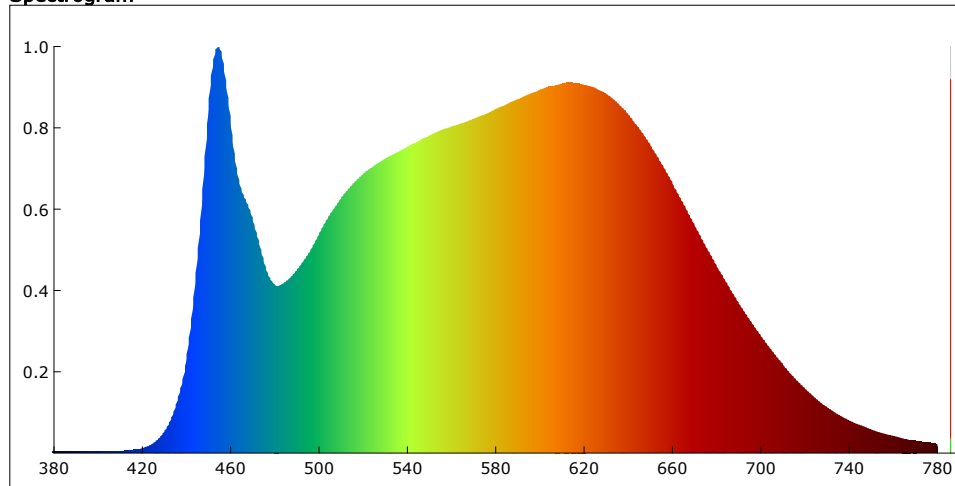

CIE1931

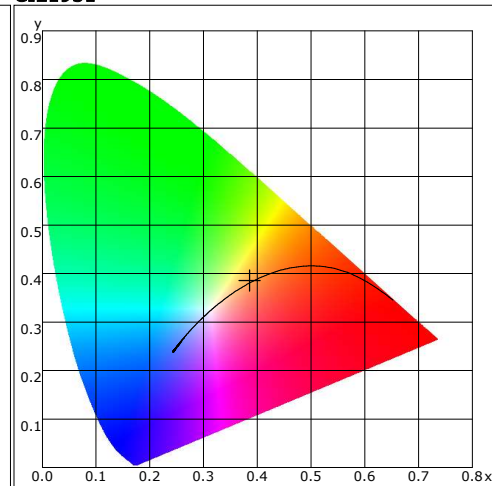

CRI

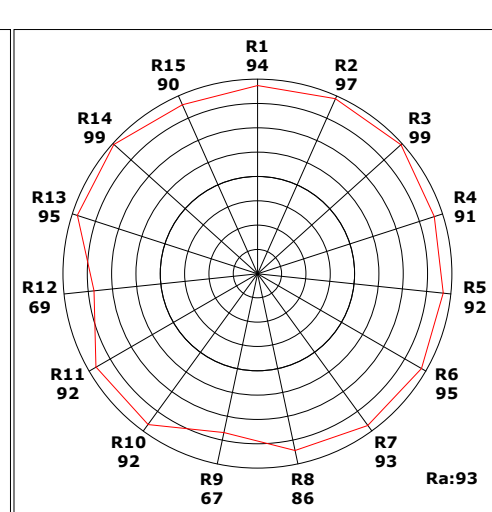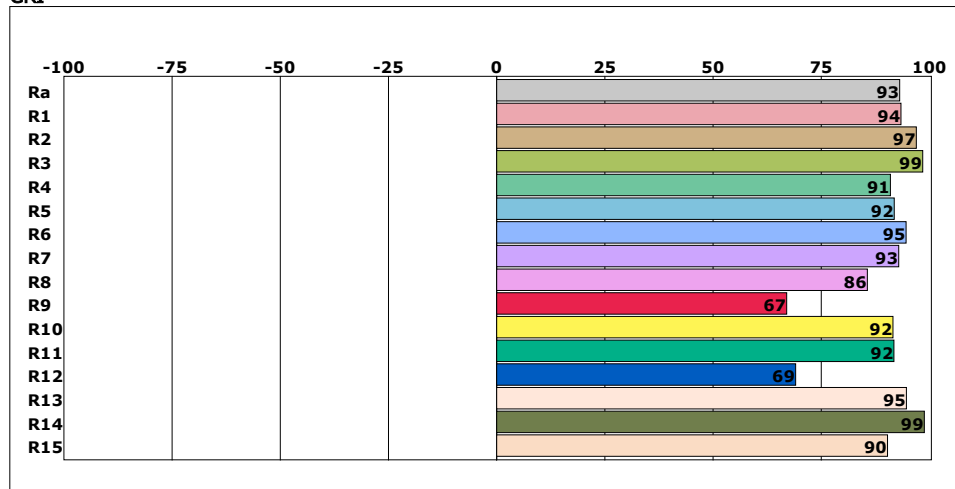

Instrument Status

Type: LMS-6000

VDark: 2313

Integral Time: 48.000ms

Scan Range: 380-780nm

VPeak: 60236

SN: 201710272

Remark: